


IPAQ-H

Universal Programmable 2-wire Transmitters

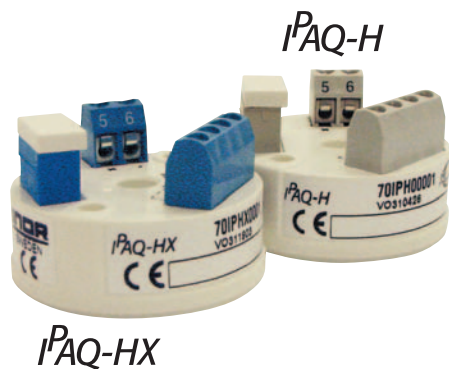

IPAQ-H/-HX are universal, isolated 2-wire transmitters for temperature and other measurement applications. They combine competitive pricing, functionality and simple configuration. Useful error correction functions improve the accuracy.


- Fully universal, linearized and high-isolation
- Accepts RTD, T/C, mV and Ω
- Sensor error and system (sensor/transmitter) error correction for highest total accuracy
- Full access to all features while in operation
- NAMUR compliant
- Consistent sensor break function
- Simplified loop check-up with calibration output
- Low sensor isolation detection
- IPRO, easy-to-use Windows configuration software

Specifications:


Input RTD	3-, 4-wire connection
Pt100 ($\alpha=0.00385$)	-200 to +1000 °C/-328 to +1832 °F
Pt1000 ($\alpha=0.00385$)	-200 to +200 °C/-328 to +392 °F
PtX $10 \leq X \leq 1000$ ($\alpha=0.00385$)	Upper range depending on X-value
Pt100 ($\alpha=0.003902$)	-200 to +1000 °C/-328 to +1832 °F
Pt100 ($\alpha=0.003916$)	-200 to +1000 °C/-328 to +1832 °F
Ni100 ¹⁾	-60 to +250 °C/-76 to +482 °F
Ni1000 ¹⁾	-10 to +150 °C/+14 to +302 °F
Input Potentiometer / resistance	3-, 4-wire connection, 0 to 2000 Ω
Input Thermocouples	Types AE, B, E, J, K, L, N, R, S, T, U
Input mV	-10 to +500 mV
Sensor failure / Low isolation	User definable output
Adjustments - Zero	Any value within range limits
Adjustments - Minimum spans	
Pt100, Pt1000, Ni100, Ni1000	10°C / 18°F
Potentiometer	10 Ω
T/C, mV	2 mV
Output	4-20 / 20-4 mA, temperature linear
Operating temperature	-40 to +85°C / -40 to +185°F
Galvanic isolation	1500 VAC, 1 min
Power supply	IPAQ-H: 6.5 to 36 VDC IPAQ-HX: 8 to 30 VDC
Intrinsic safety	IPAQ-HX: ATEX: II 1 G EEx ia IIC T4-T6 IPAQ-HX: FM: Class I-III, Div. 1, Gr. A-D
Typical accuracy	± 0.1 % of span
Connection head	DIN B or larger

¹⁾ IEC 60751


Input connections

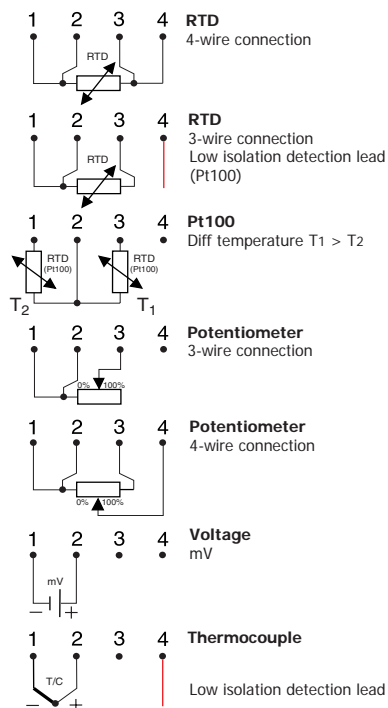

Output connections




Output load diagram



Supply voltage U (V DC)
 $R_{LOAD} = (U-6.5)/0.022$ (IPAQ-H)
 $R_{LOAD} = (U-8)/0.025$ (IPAQ-HX)

Dimensions

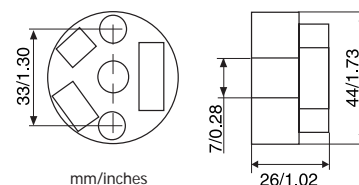

Ordering information

IPAQ-H	70IPH00001
IPAQ-HX (ATEX)	70IPHX0001
IPAQ-HX (FM)	70IPHX1001
PC Configuration Kit	70CFG00092
Configuration	70CAL00001