

DMT132 Dewpoint Transmitter for Refrigerant Dryers



The optional LED warning light tells the user when the defined dew point limit has been exceeded.

Features / Benefits

- Affordable dew point transmitter for refrigerator dryers
- High accuracy $\pm 1^{\circ}\text{C}$ ($\pm 1.8^{\circ}\text{F}$) in the measurement range of refrigerator dryers
- Excellent long-term stability - resistant to compressor oil and most other chemicals thanks to HUMICAP® technology
- Low power requirements, 10 ... 28 VDC
- Easy to verify functionality with compatible hand-held meters DM70 or HM70
- Optional LED warning light

The Vaisala HUMICAP® Dewpoint Transmitter DMT132 is an affordable dew point measurement instrument designed to verify the functionality of refrigerant dryers. It is especially well suited for OEM dryer manufacturers.

Direct measurement cuts costs

Direct outlet air dew point measurement provides accurate information about dryer functionality and is more reliable than the traditional method of measuring refrigerator temperature only. Knowledge of the real dew point ensures high quality compressed air at all times and enables customers to optimize dryer capacity. This helps to prevent investment in redundant dryer capacity and avoid unnecessary maintenance and costly malfunctions.

High accuracy and long-term stability

The DMT132 provides optimal performance in the operating range of refrigerant dryers. In the measurement range of $-3... 20^{\circ}\text{C}$ ($+26.6...+68^{\circ}\text{F}$), where the refrigerator dryers typically operate, the Td accuracy is $\pm 1^{\circ}\text{C}$ ($\pm 1.8^{\circ}\text{F}$). The instrument incorporates the proven Vaisala HUMICAP® sensor, which is resistant to compressor oil and most other chemicals, thereby providing excellent long-term stability.

Quick installation and easy field checking

It takes just a few minutes to install the DMT132 directly into a dryer or compressed air line through a G1/2" ISO thread. Vaisala sampling cells can also be used. The loop-powered electronics mean that wiring is easy and power requirements are low.

DMT132 operating voltages can be as low as 10 VDC.

Verifying the performance of the DMT132 is easy with the compatible Vaisala hand-held DM70 or HM70 meters. The user can perform possible adjustments with the Vaisala HMK15 Humidity Calibrator.



Demand for dew point sensors to verify refrigerant dryers is increasing. Direct dew point measurement enables energy savings and improved efficiency.

Technical data

Performance

DEWPOINT


| | |
|-------------------------------|--|
| Measurement range | -20 ... +50 °C (-4 ... +122 °F) Td |
| Accuracy (at +20 °C (+68 °F)) | ±1 °C for -3...20 °C (+26.6 ... +68 °F) Td ±2 °C for -15...-3 °C (+5 ... +26.6 °F) Td |

* when dewpoint is below 0 °C (+32 °F), the transmitter outputs frostpoint

| | |
|--|--------------------------|
| Response time at 20 °C (+68 °F) gas temperature and 1 bar pressure | |
| -20 -> +50 °C (-4 -> +122 °F) Td | 17 s (63%) 40 s (90%) |
| +50 -> -20 °C (+122 -> -4 °F) Td | 33 s (63%) 85 s (90%) |

CALCULATED VARIABLES

| | |
|--|---------|
| Dewpoint converted to atmospheric pressure | Tdf atm |
|--|---------|

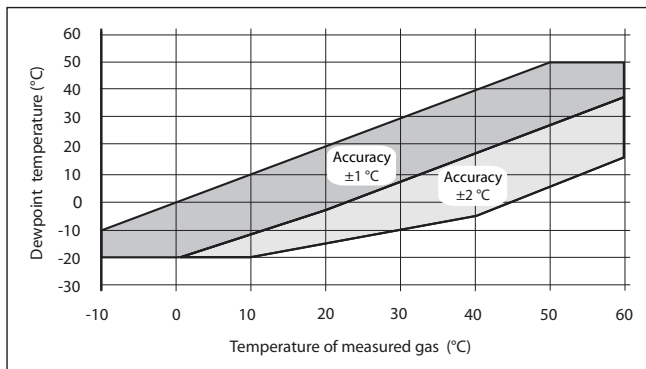

Operating environment

| | |
|-----------------------|-----------------------------------|
| Operating temperature | -10 ... +60 °C (+14 ... +140 °F) |
| Operating pressure | 0 ... 20 bar |
| Relative humidity | 0 ... 100 %RH |
| Sample flow rate | no effect on measurement accuracy |
| Measured gases | non-corrosive gases |

Outputs


| | |
|---|---------------------------|
| Analog output (scalable) | 4...20 mA, 2-wire |
| Resolution for current output | 0.002 mA |
| Accuracy of analog outputs at +20 °C | ±0.05% full scale |
| Typical temperature dependence | ±0.005% of full scale/ °C |
| Connector | 4-pin M8(IEC 60947-5-2) |
| LED indication available for defined dewpoint limit/ error state indication | |
| RS485 serial line for service use | |

General

| | |
|--|--|
| Sensor | Vaisala HUMICAP®180R |
| Recommended calibration interval (in refrigerant dryer application) | 2 years |
| Mechanical connection | G 1/2" ISO |
| Operating voltage | 10 ... 28 VDC |
| External load | max 100 ohm for supply voltages <20 VDC max 500 ohm for supply voltages 20...28 VDC |
| Weight | 65 g (2.3 oz) |
| Housing material | PPS + 40% GF |
| Housing classification | IP65 (NEMA 4) |
| Storage temperature range | -40 ... +80 °C (-40 ... +176 °F) |
| Start-up time | 3 s |
| Complies with EMC standard EN61326-1, Electrical equipment for measurement control and laboratory use - EMC requirements; Industrial environment | |

Options and accessories

| | |
|--|--|
| Tube filter | 230602 |
| Special cover set for HMK15 (calibrator fitting) | |
| DMT132 and HMP60) | 230914 |
| NPT Adapter | 210662SP |
| Sample cells | DMT242SC, DMT242SC2, DSC74, DSC74B, DSC74C, DMCOIL |
| Duct installation flange | DM240FA |
| Cables (several lengths available) | HMP50Z032, HMP50Z300SP, HMP50Z500SP, HMP50Z1000SP |
| Loop powered external display | 226476 |
| USB Service cable | 219690 |
| Connection cable to DM70/HM70 | 219980 |
| LED plug | 230388 |
| ISO" 1/2 plug | 218773 |
| NPT1/2" plug | 222507 |
| Sealing ring set (3 pcs U-seal) | 221525SP |

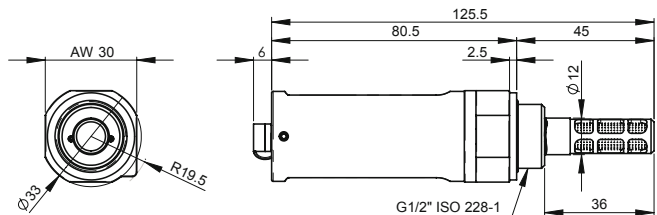

VAISALA

For more information, visit www.vaisala.com or contact us at sales@vaisala.com

Ref. B211105EN-A ©Vaisala 2011

This material is subject to copyright protection, with all copyrights retained by Vaisala and its individual partners. All rights reserved. Any logos and/or product names are trademarks of Vaisala or its individual partners. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of Vaisala is strictly prohibited. All specifications — technical included — are subject to change without notice.

